


**DATA SHEET**  
Lembar data produk



**3SQV3-16**  
Submersible Pump

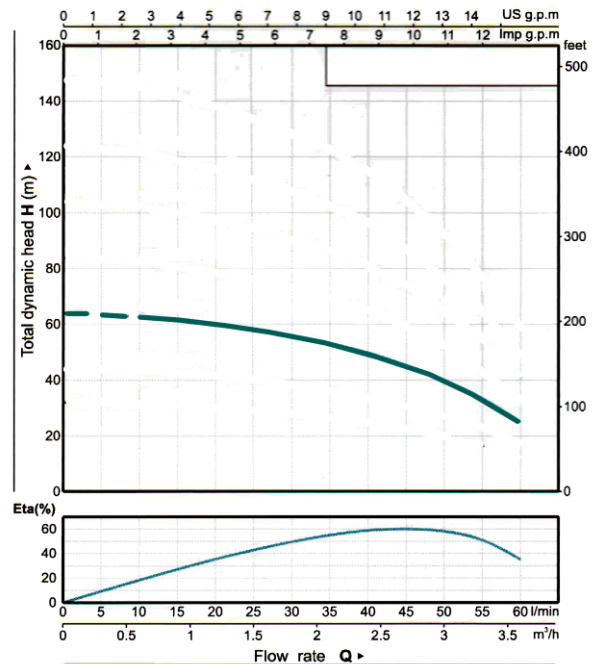

**Spesification:**

<b>Device application / Aplikasi</b>	<ul style="list-style-type: none"> <li>- Water Supply from well or reservoirs / Suplai air dari sumur atau tandon air.</li> <li>- Domestic use, for civil and industrial application / Penggunaan domestik, untuk rumah tangga dan industri.</li> </ul>
<b>Power / Listrik</b>	0.55 kW / 3/4 HP (220V - 240V / 50 Hz)
<b>Outlet</b>	1"
<b>Max. Lift / Daya Dorong Maks.</b>	62 m
<b>Max. Flow</b>	3 m3/h
<b>Max. Capacity / Kapasitas Maks.</b>	50 l/min (on H : 40 m)
<b>Max. Fluid temperature / Temperatur Cairan Maks.</b>	Up to +35° C
<b>Max. Sand Content / Kandungan Pasir Maks.</b>	0.25 %
<b>Min. Well Diameter / Diameter Sumur Min.</b>	3"
<b>Construction Material / Material Komponen</b>	<ul style="list-style-type: none"> <li>- Pump external casing : AISI 304 SS</li> <li>- Delivery Casing : Cast-CU ASTM C85500</li> <li>- Suction Latern : Cast-CU ASTM C85500</li> <li>- Diffuser : Plastic. PC</li> <li>- Impeller : Plastic. POM</li> <li>- Shaft : AISI 304 SS</li> <li>- Shaft Coupling : AISI 304 SS</li> <li>- Wear ring : AISI 304 SS</li> <li>- Motor external casing : AISI 304 SS</li> <li>- Top Chock : Cast-CU ASTM C85500</li> <li>- Bottom Support : AISI 304 SS</li> <li>- Mechanical Seal : Special seal for deep well (Graphite-Ceramic/TC)</li> <li>- Shaft : AISI 304 SS-astm 5140</li> <li>- Seal Lubricant Oil : Oil for food machinery &amp; pharmaceuetic use.</li> </ul>