


DATA SHEET
Lembar data produk



4SPV2-9
Submersible Pump

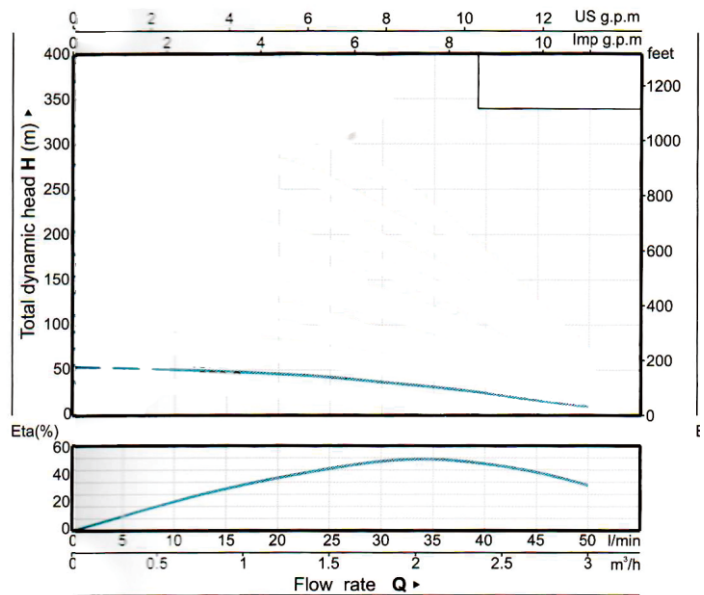

Spesification:

Device application / Aplikasi	<ul style="list-style-type: none"> - Water Supply from well or reservoirs / Suplai air dari sumur atau tandon air. - Domestic use, for civil and industrial application / Penggunaan domestik, untuk rumah tangga dan industri.
Power / Listrik	0.37 kW / 0.5 HP (220V - 240V / 50 Hz)
Outlet	1 1/4"
Max. Lift / Daya Dorong Maks.	48 m
Max. Flow	2 m ³ /h
Max. Capacity / Kapasitas Maks.	33 l/min (on H : 36 m)
Max. Fluid temperature / Temperatur Cairan Maks.	Up to +50° C
Max. Sand Content / Kandungan Pasir Maks.	0.25 %
Min. Well Diameter / Diameter Sumur Min.	4"
Construction Material / Material Komponen	<ul style="list-style-type: none"> - Delivery Casing : AISI 304 SS - Suction Latern : AISI 304 SS - Diffuser : AISI 304 SS - Impeller : AISI 304 SS - Shaft : AISI 304 SS - Shaft Coupling : AISI 304 SS - Wear ring : Rubber - Motor external casing : AISI 304 SS - Top Chock : AISI 420 SS - Bottom Support : AISI 304 SS - Mechanical Seal : Special for deep well (Graphite-Ceramic) - Shaft : AISI 304 SS - Seal Lubricant Oil : Oil for food machinery & pharmaceuetic use.