


DATA SHEET
Lembar data produk



4SPV2-18
Submersible Pump

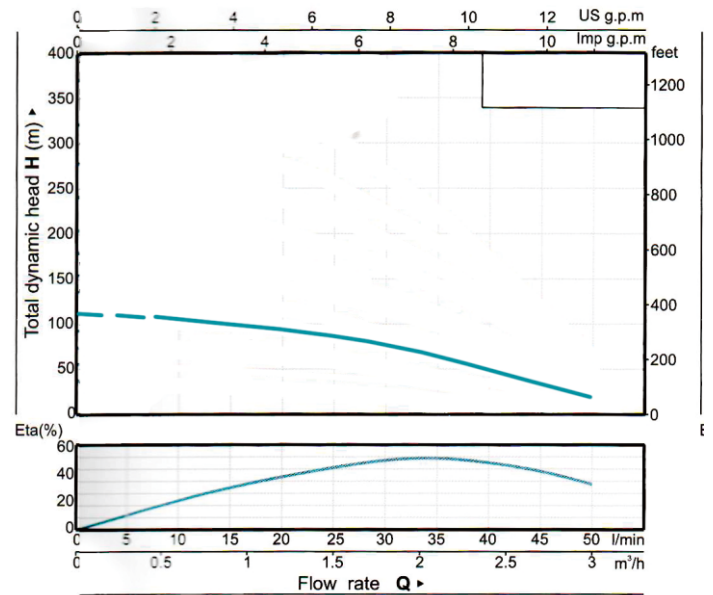

Spesification:

| | |
|---|---|
| Device application / Aplikasi | <ul style="list-style-type: none"> - Water Supply from well or reservoirs / Suplai air dari sumur atau tandon air. - Domestic use, for civil and industrial application / Penggunaan domestik, untuk rumah tangga dan industri. |
| Power / Listrik | 0.75 kW / 1 HP (220V - 240V / 50 Hz) |
| Outlet | 1 1/4" |
| Max. Lift / Daya Dorong Maks. | 94 m |
| Max. Flow | 2 m3/h |
| Max. Capacity / Kapasitas Maks. | 33 l/min (on H : 71 m) |
| Max. Fluid temperature / Temperatur Cairan Maks. | Up to +50°C |
| Max. Sand Content / Kandungan Pasir Maks. | 0.25 % |
| Min. Well Diameter / Diameter Sumur Min. | 4" |
| Construction Material / Material Komponen | <ul style="list-style-type: none"> - Delivery Casing : AISI 304 SS - Suction Latern : AISI 304 SS - Diffuser : AISI 304 SS - Impeller : AISI 304 SS - Shaft : AISI 304 SS - Shaft Coupling : AISI 304 SS - Wear ring : Rubber - Motor external casing : AISI 304 SS - Top Chock : AISI 420 SS - Bottom Support : AISI 304 SS - Mechanical Seal : Special for deep well (Graphite-Ceramic) - Shaft : AISI 304 SS - Seal Lubricant Oil : Oil for food machinery & pharmaceuetic use. |