


# DATA SHEET

Lembar data produk



## 4SPV5-12

Submersible Pump

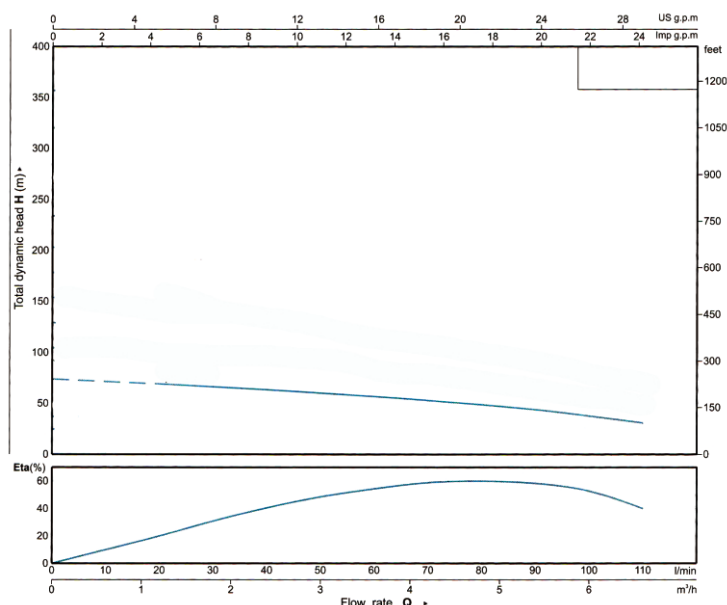

### Spesification:

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Device application / Aplikasi                    | <ul style="list-style-type: none"> <li>- Water Supply from well or reservoirs / Suplai air dari sumur atau tandon air.</li> <li>- Domestic use, for civil and industrial application / Penggunaan domestik, untuk rumah tangga dan industri.</li> </ul>                                                                                                                                                                                                                                                                                                                                                         |
| Power / Listrik                                  | 1.1 kW / 1.5 HP (220V - 240V / 50 Hz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Outlet                                           | 1 1/2"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Max. Lift / Daya Dorong Maks.                    | 63 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Max. Flow                                        | 5 m³/h                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Max. Capacity / Kapasitas Maks.                  | 83 l/min (on H : 49 m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Max. Fluid temperature / Temperatur Cairan Maks. | Up to +50°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Max. Sand Content / Kandungan Pasir Maks.        | 0.25 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Min. Well Diameter / Diameter Sumur Min.         | 4"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Construction Material / Material Komponen        | <ul style="list-style-type: none"> <li>- Delivery Casing : AISI 304 SS</li> <li>- Suction Latern : AISI 304 SS</li> <li>- Diffuser : AISI 304 SS</li> <li>- Impeller : AISI 304 SS</li> <li>- Shaft : AISI 304 SS</li> <li>- Shaft Coupling : AISI 304 SS</li> <li>- Wear ring : Rubber</li> <li>- Motor external casing : AISI 304 SS</li> <li>- Top Chock : AISI 420 SS</li> <li>- Bottom Support : AISI 304 SS</li> <li>- Mechanical Seal : Special for deep well (Graphite-Ceramic)</li> <li>- Shaft : AISI 304 SS</li> <li>- Seal Lubricant Oil : Oil for food machinery &amp; pharmaceuic use.</li> </ul> |